


10" Long Bezel Jack Panel for Standard Thermocouple Connectors

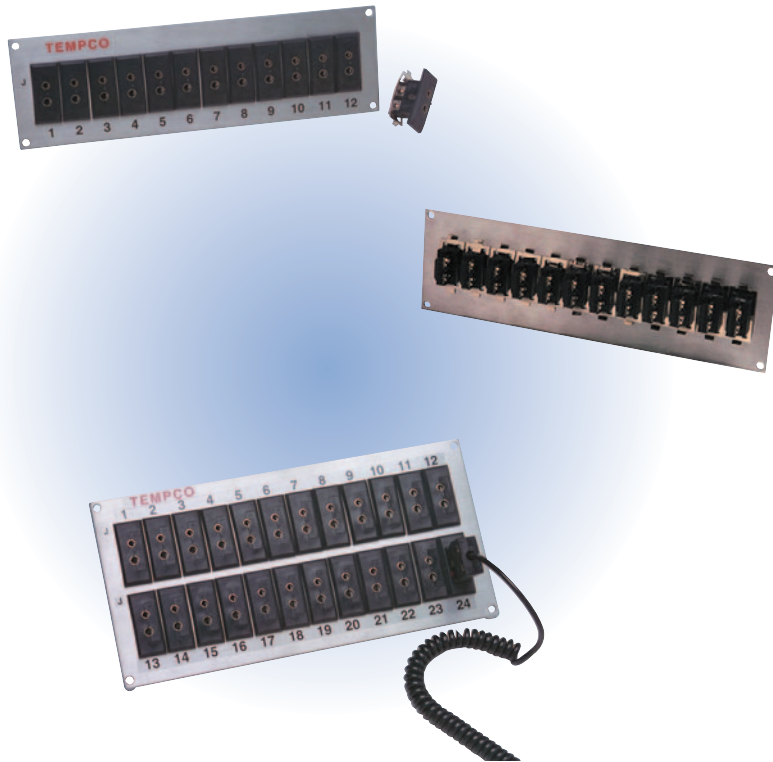

Design Features:

- * Accepts standard plugs.
- * Jacks are ANSI color coded, glass-filled nylon with a temperature rating of 350°F (177°C) continuous and 400°F (204°C) intermittent.
- * Panels are manufactured from rugged, .090" thick aluminum.
- * Brushed and anodized finishes are available at an additional cost. Consult TEMPCO with your requirements.
- * Panels are normally supplied unassembled with all necessary hardware to assemble and install included. Can be furnished assembled at an additional cost.

Standard Sizes

Part Number	Number of Rows	Panel Height H x L (in)	Number of Jacks	Cutout Size H x L (in)
JP(✚)00001	1	3½ x 10	12	1⅞ x 9¼
JP(✚)00002	2	5⅜ x 10	24	3⅜ x 9¼
JP(✚)00003	3	8⅞ x 10	36	6½ x 9¼
JP(✚)00004	4	9⅞ x 10	48	8¼ x 9¼
JP(✚)00005	5	12¾ x 10	60	11⅞ x 9¼
JP(✚)00006	6	14⅞ x 10	72	12⅞ x 9¼

- ✚ Insert calibration code (J, K, T, E, R, S, U) in Part Number, "U" is designated for RTDs and type B thermocouples




Notes: Mounting Hole Spacing: 3/16" in from each side to center of 13/64" hole (for #10 screw)

Bezel Panel Jacks are retained by a spring clip, which is installed from the rear of the panel.

Wire may be attached after jacks are installed in panel.

5-1/2" Long Bezel Jack Panel for Standard Thermocouple Connectors

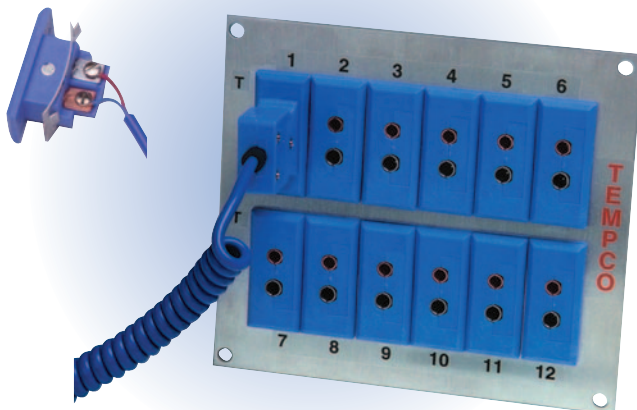

Standard Sizes

Part Number	Number of Rows	Panel Height H x L (in)	Number of Jacks	Cutout Size H x L (in)
JP(✚)00007	1	3½ x 5½	6	1⅞ x 4 ²¹ / ₃₂
JP(✚)00008	2	5⅜ x 5½	12	3⅜ x 4 ²¹ / ₃₂
JP(✚)00009	3	8⅞ x 5½	18	6½ x 4 ²¹ / ₃₂
JP(✚)00010	4	9⅞ x 5½	24	8¼ x 4 ²¹ / ₃₂
JP(✚)00011	5	12¾ x 5½	30	11⅞ x 4 ²¹ / ₃₂
JP(✚)00012	6	14⅞ x 5½	36	12⅞ x 4 ²¹ / ₃₂

- ✚ Insert calibration code (J, K, T, E, R, S, U) in Part Number, "U" is designated for RTDs and type B thermocouples